


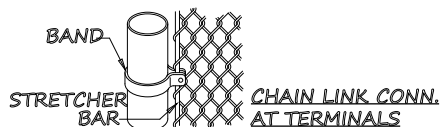
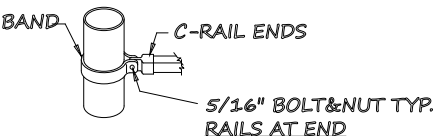
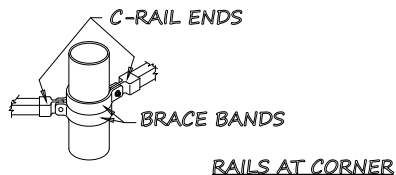



COATINGS:
 FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
 FABRIC-GALVANIZED PER (ASTM-A392 2.0 OZ/SQ.FT. OR
 -ALUMINUM COATED PER (ASTM-A491) 40 OZ/SQ.FT.
 -PVC COATED PER (ASTM-F668) CLASS 2D
FITTINGS-GALVANIZED PER (ASTM-A153)
TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

PHYSICAL PROPERTIES:

DIMENSIONS	WALL THICKNESS	WEIGHT PER FOOT	SECTION MODULUS	YIELD STRENGTH	MAX. BENDING MOMENT LB. IN.
3.25" x 2.50"	0.150"	5.30#	1.25	60,000	75,000
OPTIONAL 3.25" x 2.50"	0.130"	4.50#	1.083	60,000	64,980




5.30 LB/FT 7.85 kg/m

OPTIONAL 4.40 LB/FT 6.52 kg/m


0.130 WALL

TERMINAL POST
 — LBS PER FT.
 — INCHES O.D.

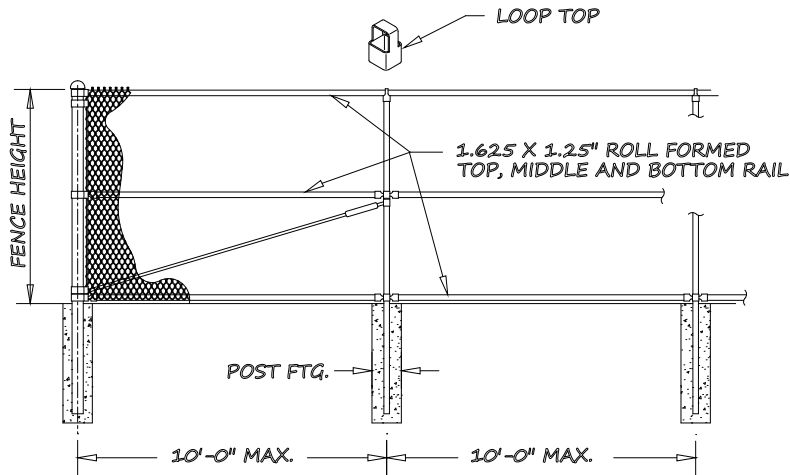


POST SPACING MAY VARY
 DEPENDING ON
 APPLICATION AND WIND
 LOAD SPECIFIED IN M.P.H.

LINE POST TOP
 LOOP CAP



CHAIN LINK FABRIC
 #6 GA. 3/8" MESH
 #6 GA. 5/8" MESH

C-RAIL COUPLING
 (20' MAX. INTERVALS)



CHAIN LINK FABRIC
 3/8" - 5/8" MESH TWIST TOP
 KNUCKLE BOTTOM SELVAGES

TIE WIRES
 24" MAX.
 SPACING

ITEM	QNTY	DESCRIPTION	MACHINING TOLERANCES		FABRICATION TOLERANCES	
SCALE	NONE	CHK'D BY DTM	0.1	± 0.030	UNDER 18"	± 1/32
DWN BY	DTM 2-24-20	APP'D BY	0.015	± 0.015	18" AND OVER	± 1/16
			0.005	± 0.005	ALL MACHINED SURFACES 125° BREAK ALL SHARP EDGES	
			ANGLES	± 1/4°		

SUPER 'C' - w/o BARB WIRE, ROUND TERM. (MINI)

CAD FILENAME:
 FENCE 4-1-1
 LAST PLOT DATE:
 2-24-20

GREGORY
 FENCE
 4100 13th Street SW
 Canton, Ohio 44710

REF. No.
 DRWG. No.

FENCE 4-1-1