


COATINGS:






- FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
- FABRIC-GALVANIZED PER (ASTM-A392) ___ OZ/SQ.FT. OR
- ALUMINUM COATED PER (ASTM-A491) .40 OZ/SQ.FT.
- PVC COATED PER (ASTM-F668) CLASS ___
- FITTINGS-GALVANIZED PER (ASTM-A153)

BENDING FORCE ON THE X-X AXIS


LINE POST=274 LBS @ 6'-0" ABOVE GRADE
 TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

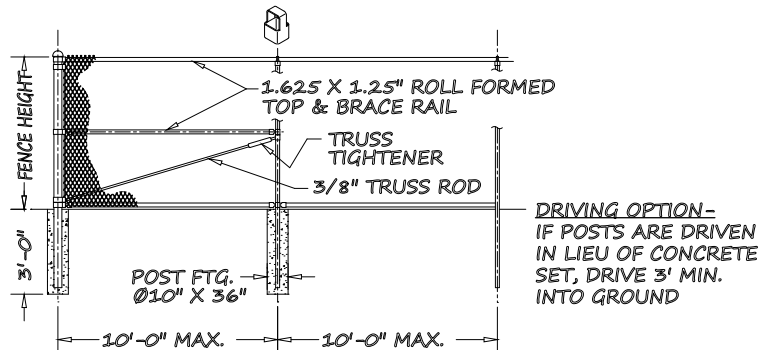

DRIVING OPTION-
 IF POSTS ARE DRIVEN
 IN LIEU OF CONCRETE
 SET, DRIVE 3' MIN.
 INTO GROUND

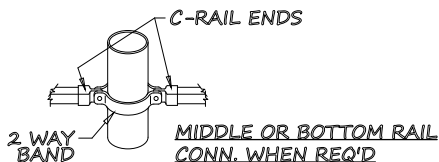


BRACING ARRANGEMENT




TOP RAIL

LINE POST TOP




CHAIN LINK FABRIC
 #9 GA. 2" MESH
 #6 GA. 2" MESH


RAIL COUPLING
 (20' MAX. INTERVALS)



CHAIN LINK FABRIC
 #9 GA. 2" MESH TWIST
 TOP & KNUCKLE BOTTOM SELVAGES



LINE POST

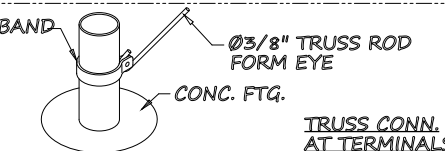

TRUSS CONN. AT TERMINALS

1.875"
 47.6 MM



TERMINAL POST
 ___ LBS PER FT.
 ___ INCHES O.D.

ITEM		QNTY		DESCRIPTION		MATERIAL	
SCALE		NONE		CHK'D BY DTM		MACHINING TOLERANCES	
DWN BY		DTM01-05-17		APP'D BY		FABRICATION TOLERANCES	
STANDARD 'C' - w/o BARB WIRE, TOP C-RAIL & ROUND TERM. (CHAIN LINK)							
CAD FILENAME:		FENCE 4-15		LAST PLOT DATE:		09/05/17	
REF. No.		DRWG No.		FENCE 4-15			



4100 13th Street SW
 Canton, Ohio 44710