


**COATINGS:**




- FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
- FABRIC-GALVANIZED PER (ASTM-A392)      OZ/SQ.FT. OR
- ALUMINUM COATED PER (ASTM-A491) .40 OZ/SQ.FT.
- PVC COATED PER (ASTM-F668) CLASS
- FITTINGS-GALVANIZED PER (ASTM-A153)

**BENDING FORCE ON THE X-X AXIS**

- LINE POST=351 LBS @ 6'-0" ABOVE GRADE
- TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

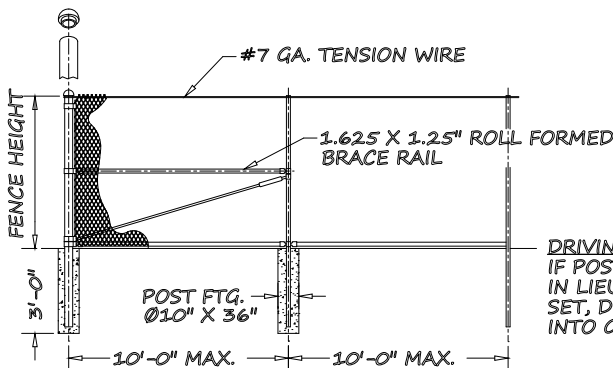



**DRIVING OPTION-**  
IF POSTS ARE DRIVEN  
IN LIEU OF CONCRETE  
SET, DRIVE 3' MIN.  
INTO GROUND.

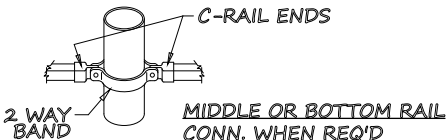

LESS THAN 2 LINE POSTS  
BRACE ONLY


MORE THAN 2 LINE POSTS  
BRACE AND TRUSS ROD

**BRACING ARRANGEMENT**

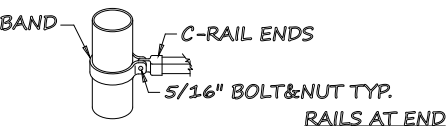

LINE POST TOP  
OPTIONAL

TENSION  
WIRE




**CHAIN LINK FABRIC**

- #9 GA. 2" MESH
- #6 GA. 2" MESH


TENSION  
WIRE

HOG RINGS  
(24" MAX. SPACING)



HOG RINGS  
24" MAX.  
SPACING


**CHAIN LINK FABRIC**  
#9 GA. 2" MESH TWIST TOP  
KNUCKLE BOTTOM SELVAGES

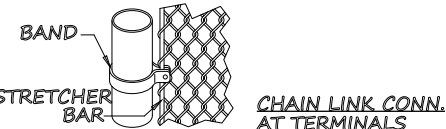

**TERMINAL POST**



— LBS PER FT.  
— INCHES O.D.

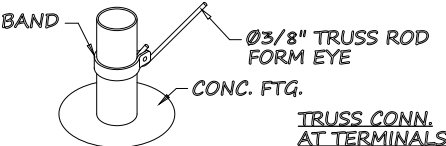

ITEM		QNTY	DESCRIPTION		MATERIAL
			MACHINING TOLERANCES		FABRICATION TOLERANCES
SCALE	NONE	CHK'D BY	JMH	0.1 ± 0.030	UNDER 1.8" ± 1/32
				0.015 ± 0.015	1.8" AND OVER ± 1/16
				0.005 ± 0.005	ALL MACHINED SURFACES ± 1/64
				ANGLES ± 1/48	BREAK ALL SHARP EDGES
DWN BY IDI 01/08/17 APP'D BY					
HEAVY 'C' - w/o BARB WIRE, TOP TENSION WIRE & ROUND TERM. (CHAIN LINK)					
CAD FILENAME: FENCE 4-17			<b>GREGORY</b> FENCE 4300 13th Street SW Canton, Ohio 44710		
LAST PLOT DATE: 09-05-17					
			REF. No. DRWG No.		FENCE 4-17