





COATINGS:

FRAMEWORK-COATED PER (ASTM-F-1043) TYPE A
 FABRIC-GALVANIZED PER (ASTM-A392) ___ OZ/SQ.FT. OR
 -ALUMINUM COATED PER (ASTM-A491) .40 OZ/SQ.FT.
 -PVC COATED PER (ASTM-F668) CLASS ___
 FITTINGS-GALVANIZED PER (ASTM-A153)

BENDING FORCE ON THE X-X AXIS
 LINE POST=351 LBS @ 6'-0" ABOVE GRADE
 TOP RAIL=263 LBS @ MID POINT OF 10'-0" SPAN

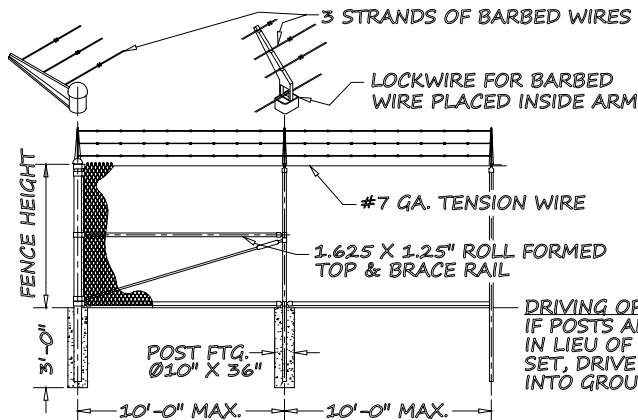



DRIVING OPTION-
 IF POSTS ARE DRIVEN
 IN LIEU OF CONCRETE
 SET, DRIVE 3' MIN.
 INTO GROUND.

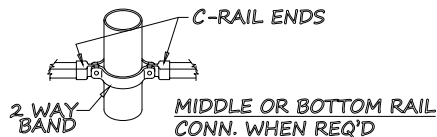


LESS THAN 2 LINE POSTS
 BRACE ONLY

MORE THAN 2 LINE POSTS
 BRACE AND TRUSS ROD


BRACING ARRANGEMENT



LINE POST TOP
 BARB ARM



CHAIN LINK FABRIC
 #9 GA. 2" MESH
 #6 GA. 2" MESH





HOG RINGS
 24" MAX.
 SPACING

CHAIN LINK FABRIC
 #9 GA. 2" MESH TWIST TOP
 KNUCKLE BOTTOM SELVAGES



TERMINAL POST
 ___ LBS PER FT.
 ___ INCHES O.D.

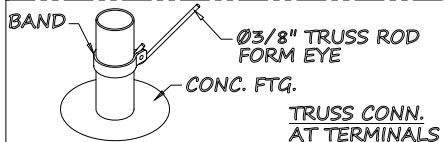

ITEM	QNTY	DESCRIPTION	MATERIAL
		MACHINING TOLERANCES	FABRICATION TOLERANCES
SCALE	NONE	CHK'D BY DTM	UNDER 18" ±1/32
			18" AND OVER ±1/16
DWN BY DTM 09-11-17		APP'D BY	ALL MACHINED SURFACES ±.005
			ANGLES ±.148
HEAVY 'C' - with BARB WIRE, TOP TENSION WIRE & ROUND TERM. (CHAIN LINK)			
CAD FILENAME: FENCE 4-18		GREGORY FENCE 4100 13th Street SW Canton, Ohio 44710	
LAST PLOT DATE: 09/11/17			